

TWO-WAY RADIOS

GP644: The Small Popular Radio


The Small Popular Radio is the simple two-way radio solution for professionals who need to stay in contact. The discreet GP644 can increase productivity, keeping users communicating, whilst allowing them to concentrate on the job at hand. With the Small Popular Radio, communication couldn't be easier.



Operator friendly controls and features include:

- Signalling The fully compliant MPT signalling package includes MPT1343, Regionet 43 and ANN modes of operation. Radios are configurable for up to 2 personalities including Talkgroup Select and Conventional signalling.
- X-Pand™ Voice Compression and Low Level Expansion Crisp, clear and strong audio quality in virtually any noisy environment. Low level expansion allows further improvements in audio quality by reducing noise usually heard during pauses in conversation.
- Dynamic Regrouping Provides over-the-air reconfiguration of group identity.
- Missed Call Alerts
 The radio can store an incoming caller identity and prompt the user to return the call they receive.

- Wideband and Programmable Channel Spacing Provides flexibility in deployment and stocking.
- Time-out Timer
 Limits the amount of time a user
 has to continuously transmit on a
 channel. This allows for more
 efficient use of the channel.

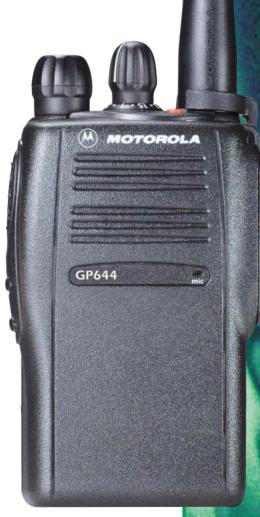

As Dedicated As You Are

GP644 Portable Two-Way Radio Specifications

General Specifications				
Power Supply	Rechargeab	Rechargeable battery 7.5V		
Dimensions: H x W x D (mm) With standard Lilon battery With high capacity Lilon battery	101.5 x 5	Height excluding knobs 101.5 x 55.5 x 30.5 101.5 x 55.5 x 35.5		
Weight: (gm) With Standard Lilon battery With high capacity Lilon battery	_	250 270		
Average Battery Life @5/5/90 Cycle: With Standard Lilon battery With high capacity Lilon battery	Low Power >9 hours >13 hours	High Power >7 hours >10 hours		
Sealing:	,	Withstands rain testing per MIL STD 810 C/D/E and IP54		
Shock and Vibration:		Protection provided via impact resistant housing exceeding MIL STD 810-C/D/E and TIA/EIA 603		
Dust and Humidity:	· ·	Protection provided via environment resistant housing exceeding MIL STD 810 C/D/E and TIA/EIA 603		

Portable Military Standards 810 C, D, & E							
	810C		810D		810E		
Applicable MIL-STD	Methods	Procedures	Methods	Procedures	Methods	Procedures	
Low Pressure	500.1	1	500.2	2	500.3	2	
High Temperature	501.1	1,2	501.2	1,2	501.3	1,2	
Low Temperature	502.1	1	502.2	1,2	502.3	1,2	
Temp. Shock	503.1	1	503.2	1	503.3	1	
Solar Radiation	505.1	1	505.2	1	505.3	1	
Rain	506.1	1,2	506.2	1,2	506.3	1,2	
Humidity	507.1	2	507.2	2,3	507.3	2,3	
Salt Fog	509.1	1	509.2	1	509.3	1	
Dust	510.1	1	510.2	1	510.3	1	
Vibration	514.2	8,10	514.3	1	514.4	1	
Shock	516.2	1,2,5	516.3	1,4	516.4	1,4	

Data for +25°C unless otherwise specified

Transmitter	
*Frequencies - Full Bandsplit	UHF 1: 403-470 MHz
Channel Spacing	12.5/20/25 kHz
Frequency Stability (-30°C to +60°C, +25° Ref.)	0.00025%
Power	Low: 1W High: 4W
FM Hum & Noise	-40 dB typical
Spurs/Harmonics	-36 dBm <1 GHz -30 dBm >1 GHz
Audio Response (300-3000Hz)	+1 to -3 dB
Audio Distortion	<5% typical

Receiver	
*Frequencies - Full Bandsplit	UHF 1: 403-470 MHz
Channel Spacing	12.5/20/25 kHz
Sensitivity (12 dB SINAD) EIA	0.35 μV typical
Intermodulation ETS	-65dB
Adjacent Channel Selectivity	60 dB @ 12.5 kHz 70 dB @ 25 kHz
Spurious Rejection	-70 dB
Rated Audio	0.5W
Image Rejection	-70dB

* Availability subject to individual country's laws and regulation.

Specifications are subject to change without prior notice and are issued for guidance purposes only.

Radios meet all applicable regulatory requirements.

Conforms to RTTE Directives: 1999/5/EC

Relevant standards: EN300 086-2, EN300 113-2, EN301 489-05

Contact your local Authorised Motorola Dealer to find out more about how communicating with the Professional Radio series will benefit your organisation.

> UK Sales Office Middle East and Africa Headquarters: Motorola Ltd

Javs Close, Viables Industrial Estate Basingstoke, Hampshire RG22 4PD United Kingdom

Tel: +44 1256 488093 Fax: +44 1256 488080 Central Europe Headquarters:

Motorola GmbH Geschäftsbereich Funk Am Borsigturm 130 13507 Berlin, Germany Tel: +49 30 / 66 86-0

Fax: +49 30 / 66 86-18 09 Fax: +49 6128 951084

Eastern Europe, Turkey and Central Asia Headquarters:

Motorola GmbH Heinrich Hertz Strasse 1 65232 Taunusstein Germany

Tel: +49 6128 700



For exceptional performance, reliability and quality, Motorola Original accessories and batteries are the only options. For full details, please refer to the Professional Radio Series Accessories brochure.









Motorola, Professional Radios, As Dedicated As You Are and X-Pand are trademarks of Motorola Inc. © 1998 Motorola, Printed in the United Kingdom http://www.motorola.com